

uniview

# IPC6222ER-X30(P) 2MP 30x IR Network PTZ Dome Camera



## Features:

- 1/2.8" progressive scan CMOS
- 30x optical zoom (4.5~135mm)
- IP66
- Smart IR, up to 100m (328 ft) IR distance




# IPC6222ER-X30(P)

## 2MP 30x IR Network PTZ Dome Camera

| Camera                 | IPC6222ER-X30  | IPC6222ER-X30P      |
|------------------------|--|---------------------|
| Sensor                 | 1/2.8", 2 megapixel, progressive scan, CMOS  |                     |
| Lens                   | 4.5 ~ 135mm (30x optical zoom)   |                     |
| Angle of View (H)      | 62.9° (wide) ~ 2.3° (tele)   |                     |
| Iris                   | Auto/Manual; F1.6 ~ F4.8   |                     |
| Shutter                | Auto/Manual; shutter time: 1/6s ~ 1/8000s  |                     |
| Minimum Illumination   | Color: 0.03lux (F1.6, 50IRE), black/white: 0.01lux (F1.6, 50IRE)                                       |                     |
| S/N                    | >52dB  |                     |
| Day/Night              | IR-cut filter with auto switch (ICR)   |                     |
| <b>Video</b>           |  |                     |
| Max. Resolution        | 1920×1080  |                     |
| Video Compression      | H.264, MJPEG   |                     |
| Frame Rate             | 1080P (1920×1080) 30fps; 720P (1280×720) 30fps; D1 (720×576) 25fps                                     |                     |
| Video Streaming        | Triple   |                     |
| Digital Zoom           | Supported  |                     |
| <b>Audio</b>           |  |                     |
| Audio Compression      | G.711  |                     |
| Two-way Audio          | Supported  |                     |
| <b>Storage</b>         |  |                     |
| Edge Storage           | Micro SD, up to 64GB   |                     |
| <b>Network</b>         |  |                     |
| Protocols              | L2TP, IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, Qos, NTP, FTP, HTTP, SNMP, SIP          |                     |
| Compatible Integration | ONVIF, IMOS, API   |                     |
| <b>Pan &amp; Tilt</b>  |  |                     |
| Pan                    | Pan range: 360° (endless), pan speed: 0.1°/s ~ 240°/s, preset speed: 300°/s                            |                     |
| Tilt                   | Tilt range: -15° ~ +90° (auto reverse), tilt speed: 0.1° ~ 160°/s, preset speed: 240°/s                |                     |
| Number of Preset       | 255  |                     |
| Patrol                 | Up to 16 patrols, up to 32 presets per patrol<br>Note: the total number of patrols and patterns is 16. |                     |
| Pattern                | Up to 16 patterns, with the total recording time not less 15 minutes per pattern                       |                     |
| <b>Interface</b>       |  |                     |
| Audio I/O              | Audio cable  |                     |
|                        | Input: impedance 35kΩ; amplitude 2V [p-p]  |                     |
|                        | Output: impedance 600Ω; amplitude 2V [p-p]   |                     |
| Alarm I/O              | 1/ 1   |                     |
| Network                | 1 RJ45 10M/100M Base-TX Ethernet   |                     |
| <b>General</b>         |  |                     |
| Power                  | 24V AC, 24V DC   | 24V AC, 24V DC, PoE |
|                        | Power consumption: 9~42W(IR: 16W, heater: max. 24W)  |                     |
| Dimensions (Ø x H)     | Ø227 x 359.4mm (Ø8.9" x 14.2")   |                     |
| Weight                 | 5.28kg (11.6lb)  |                     |
| Working Environment    | -40°C ~ +65°C (-40°F ~ 149°F), humidity ≤ 90% RH(non-condensing)                                       |                     |
| Ingress Protection     | IP66   |                     |

\*Product specifications and availability are subject to change without notice.

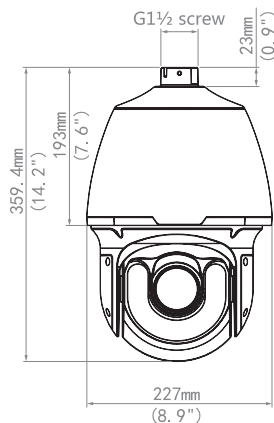

Zhejiang Uniview Technologies Co., Ltd.  
 Address: Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, P. R. China, 310051  
 Website: [www.uniview.com](http://www.uniview.com) Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com)  
 ©2015 Zhejiang Uniview Technologies Co., Ltd. all rights reserved.  
 2015.08-OM-150831-HZ V2.0