

uniview

IPC6242SR-X22U

2MP 22x Starlight IR Network PTZ Dome Camera

Features:

- Starlight illumination
- 1/1.9" progressive scan CMOS
- Up to 1920 x 1080 resolution, 60fps
- Smart IR, up to 150m (492ft) IR distance
- 22x optical zoom (6.5~143mm)
- IP66




IPC6242SR-X22U

2MP 22x Starlight IR Network PTZ Dome Camera

Camera	
Sensor	1/1.9", 2 megapixel, progressive scan, CMOS
Lens	6.5 ~ 143mm (22x optical zoom)
Angle of View (H)	70° (wide) ~ 3.76° (tele)
Iris	Auto/Manual; F1.5 ~ F3.4
Shutter	Auto/Manual; shutter time: 1/6s ~ 1/8000s
Minimum Illumination	Color: 0.002lux (F1.6, 50IRE), black/white: 0.0002lux (F1.6, 50IRE)
S/N	>52dB
Day/Night	IR-cut filter with auto switch (ICR)
Video	
Max. Resolution	1920×1080
Video Compression	H.264, MJPEG
Frame Rate	1080P (1920×1080): max.60fps; 720P (1280×720): max.60fps; D1 (720×576): max.25fps
Video Streaming	Triple
Digital Zoom	Supported
Audio	
Audio Compression	G.711
Two-way Audio	Supported
Storage	
Edge Storage	Micro SD, up to 64GB
Network	
Protocols	L2TP, IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, NTP, FTP, HTTP, SNMP, SIP
Compatible Integration	ONVIF, IMOS, API
Pan & Tilt	
Pan	Pan range: 360° (endless), pan speed: 0.1°/s ~ 240°/s, preset speed: 300°/s
Tilt	Tilt range: -15° ~ +90° (auto reverse), tilt speed: 0.1° ~ 160°/s, preset speed: 240°/s
Number of Preset	255
Patrol	Up to 16 patrols, up to 32 presets per patrol Note: the total number of patrols and patterns is 16.
Pattern	Up to 16 patterns, with the total recording time not less 15 minutes per pattern
Interface	
Audio I/O	Audio cable
	Input: impedance 35kΩ; amplitude 2V [p-p]
	Output: impedance 600Ω; amplitude 2V [p-p]
Alarm I/O	2/1
Serial Port	1 RS485
Network	1 RJ45 10M/100M Base-TX Ethernet
Video Output	1 BNC, impedance 75 Ω; amplitude 1V [p-p]
General	
Power	24V AC (default), 24V DC, 12 ~46W (27W with IR, max. 12W with heater)
Dimensions (Ø x H)	Ø227 x 359.4mm (Ø8.9" x 14.2")
Weight	5.5kg (12.1lb)
Working Environment	-40°C ~ +70°C (-40°F ~ 158°F), humidity ≤ 90% RH(non-condensing)
Ingress Protection	IP66

*Product specifications and availability are subject to change without notice.

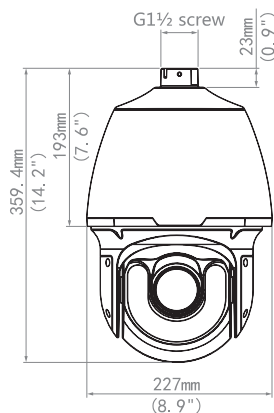

Zhejiang Uniview Technologies Co., Ltd.
 Address: Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, P. R. China, 310051
 Website: www.uniview.com Email: overseasbusiness@uniview.com
 ©2015 Zhejiang Uniview Technologies Co., Ltd. all rights reserved.
 2015.08-OM-150832-HZ V2.0