

uniview

# IPC6242SR-X22/X30

## 2MP 22x/30x IR Network PTZ Dome Camera



### Features:

- 1/2.8" progressive scan CMOS
- Up to 1920 × 1080 resolution, 30fps
- 22x/30x optical zoom
- Smart IR, up to 150m (492ft) IR distance
- IP66




# IPC6242SR-X22/X30

## 2MP 22x/30x IR Network PTZ Dome Camera

Camera	IPC6242SR-X22	IPC6242SR-X30
Sensor	1/2.8", 2 megapixel, progressive scan, CMOS	
Lens	4.7 ~ 103mm (22x optical zoom)	4.5 ~ 135mm (30x optical zoom)
Angle of View (H)	61.9° (wide) ~ 3.4° (tele)	62.9° (wide) ~ 2.3° (tele)
Iris	Auto/Manual; F1.6 ~ F3.2	Auto/Manual; F1.6 ~ F4.8
Shutter	Auto/Manual; shutter time: 1/6s ~ 1/8000s	
Minimum Illumination	Color: 0.03lux (F1.6, 50IRE), black/white: 0.01lux (F1.6, 50IRE)	
S/N	>52dB	
Day/Night	IR-cut filter with auto switch (ICR)	
<b>Video</b>		
Max. Resolution	1920×1080	
Video Compression	H.264, MJPEG	
Frame Rate	1080P (1920×1080): max.30fps; 720P (1280×720): max.30fps; D1 (720×576): max.25fps	
Video Streaming	Triple	
Digital Zoom	Supported	
<b>Audio</b>		
Audio Compression	G.711	
Two-way Audio	Supported	
<b>Storage</b>		
Edge Storage	SD, up to 64GB	Micro SD, up to 64GB
<b>Network</b>		
Protocols	L2TP, IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, Qos, NTP, FTP, HTTP, SNMP, SIP	
Compatible Integration	ONVIF, IMOS, API	
<b>Pan &amp; Tilt</b>		
Pan	Pan range: 360° (endless), pan speed: 0.1°/s ~ 240°/s, preset speed: 300°/s	
Tilt	Tilt range: -15° ~ +90° (auto reverse), tilt speed: 0.1° ~ 160°/s, preset speed: 240°/s	
Number of Preset	255	
Patrol	Up to 16 patrols, up to 32 presets per patrol Note: the total number of patrols and patterns is 16	
Pattern	Up to 16 patterns, with the total recording time not less 15 minutes per pattern	
<b>Interface</b>		
Audio I/O	3.5mm audio interface	Audio cable
	Input: impedance 35kΩ; amplitude 2V [p-p]	
	Output: impedance 600Ω; amplitude 2V [p-p]	
Alarm I/O	2/1	
Network	10M/100M Base-TX Ethernet	
Video Output	1 BNC, impedance 75Ω; amplitude 1V [p-p]	
<b>General</b>		
Power	24V AC, 24V DC, 8 ~ 52.5W (IR: 34W, moter: 7.5W, heater: max. 14W, fan: 3W)	
Dimensions (Ø x H)	Ø227 x 359.4mm (Ø8.9" x 14.2")	
Weight	5.4kg (11.9lb)	
Working Environment	-40°C ~ +70°C (-40°F ~ 158°F), humidity ≤ 90% RH (non-condensing)	
Ingress Protection	IP66	

\*Product specifications and availability are subject to change without notice.

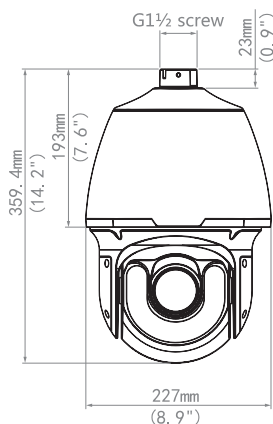

Zhejiang Uniview Technologies Co., Ltd.  
 Address: Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, P. R. China, 310051  
 Website: [www.uniview.com](http://www.uniview.com) Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com)  
 ©2015 Zhejiang Uniview Technologies Co., Ltd. all rights reserved.  
 2015.08-OM-150833-HZ V2.0