

16-Channel Video Encoder

DVS4116




Key Features

- 16 channel video and audio inputs
- H.264 video compression
- Full channel 960H realtime encoding
- Dual-stream


Specifications

| DVS4116 | |
|---------------------------|--|
| Video | |
| Video Input | 16-ch, BNC |
| Video Standard | H.264 |
| Video bit rate | 960H/D1: 512 Kbit/s - 8192 Kbit/s; 2CIF: 256 Kbit/s - 4096 Kbit/s; CIF: 128 Kbit/s - 1024 Kbit/s |
| Video stream | 1)H.264 single stream; 2) H.264 + H.264 dual streams |
| Audio | |
| Input | 16-ch |
| Output | 1-ch |
| Audio Standard | G.711 μ |
| Sound track | Mono |
| Mute | Support |
| External Interface | |
| Network Interface | 1 RJ-45 10M/100M/1000M adaptive Ethernet Interface |
| USB Interface | 1 USB2.0 interfaces |
| Serial Interface | 1 RS-232, 1 RS-485 |
| Alarm Input | 8-ch |
| Alarm Output | 2-ch |
| General | |
| Power Supply | 100~240 VAC |
| Consumption | 20 W |
| Working Temperature | -10°C ~ + 60°C (+14°F ~ +140°F) |
| Working Humidity | 10% ~ 90% |
| Weight | ≤ 3.0 Kg (6.6 lb) |
| Dimensions | 44 x 440 x 240mm (1.7" x 17.3" x 9.5") |

Dimensions

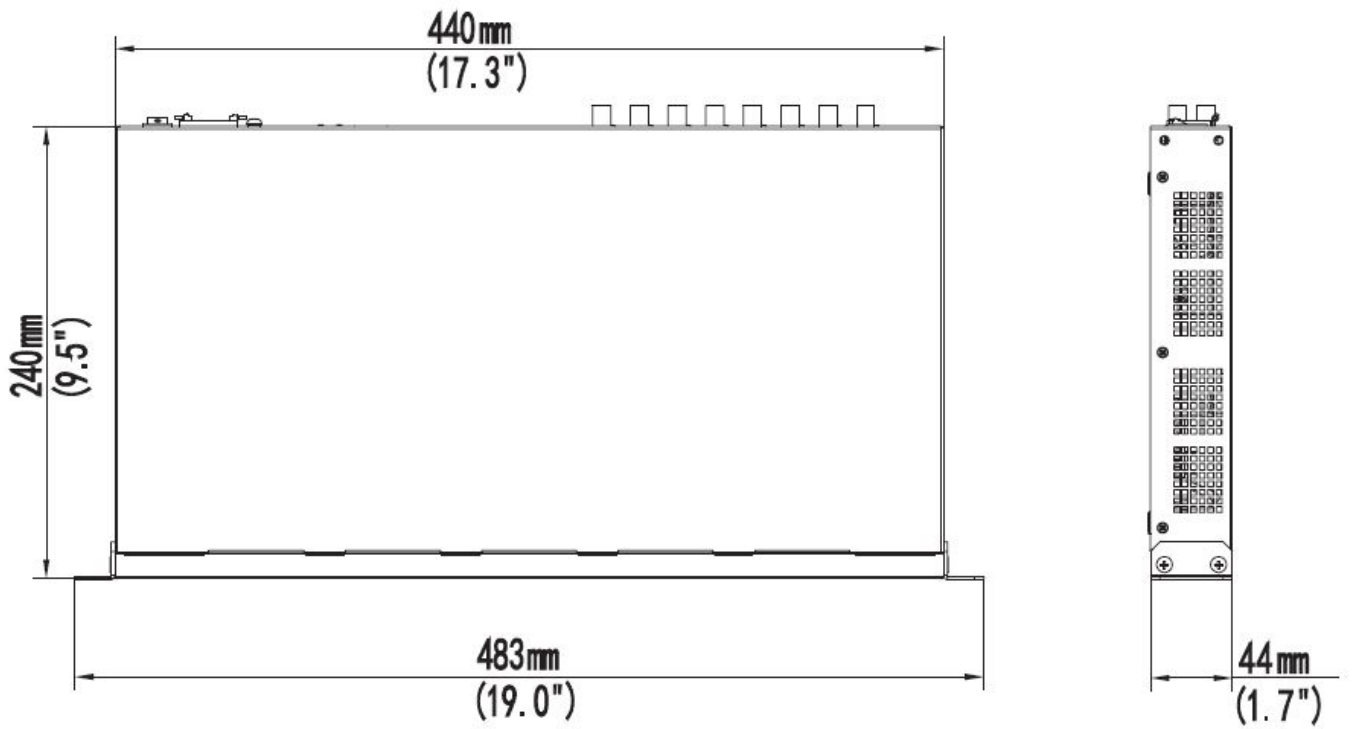


Rear Panel

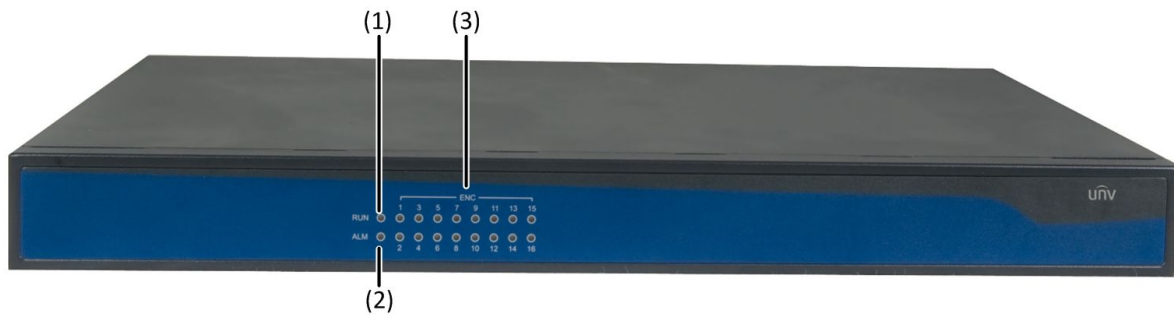

Front view

| | | |
|-----------------|---------------|------------------|
| (1) Running LED | (2) Alarm LED | (3) Encoding LED |
|-----------------|---------------|------------------|

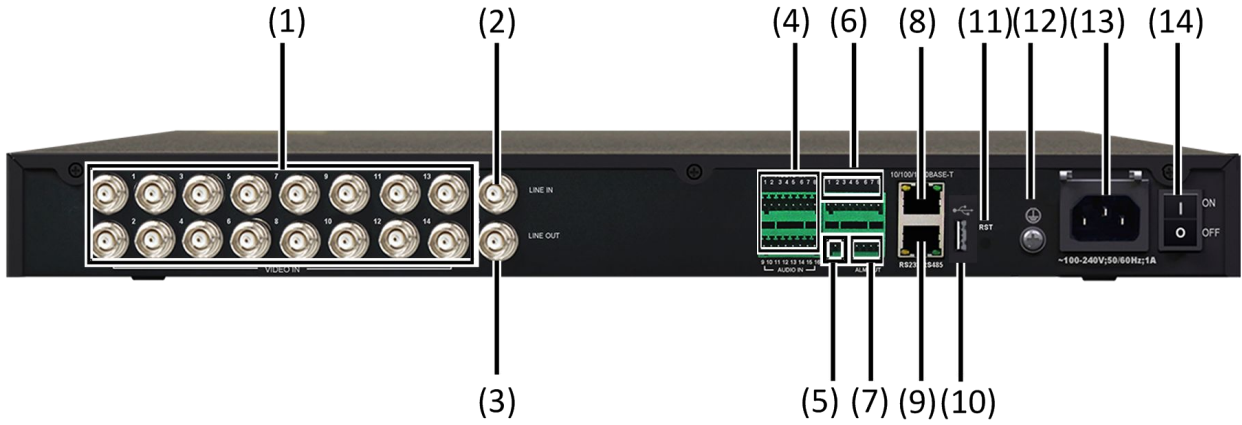

Rear view

| | | |
|--------------------|-------------------|----------------------|
| (1) Video In Port | (2) Line In Port | (3) Line Out port |
| (4) Audio In Port | (5) GND | (6) Alarm In Port |
| (7) Alarm Out Port | (8) Ethernet Port | (9) RS232/RS485 port |
| (10) USB Port | (11) Reset Button | (12) GND |
| (13) Power Input | (14) Power On/Off | |

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2011-2015 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.